



## ***Lecture 12***

# Chair of Mobile Business & Multilateral Security

Business Informatics 2 (PWIN)  
SS 2021

Database Management II  
Structured Query Language

**Prof. Dr. Kai Rannenber**

Chair of Mobile Business & Multilateral Security  
Johann Wolfgang Goethe University Frankfurt a. M.

- Introduction
- Basic SQL Language Elements
- Advanced SQL Language Elements
- SQL-driven Database Features
- Issues of SQL
- SQL Tool: W3Schools

- SQL - Structured Query Language
  - Developed in the 1970s
  - Current standard for management of relational databases:
    - ANSI (American National Standards Institute)
    - ISO (International Standardization Organization),
    - Current version: **SQL:2019**
  - Non-procedural, descriptive and declarative language for the use of databases
    - With a SQL query, a user only expresses a desired result (and not the way how this result has to be generated).

# Basic SQL Language Components

- **Data Definition Language (DDL)**
  - Definition of data structures (e.g. tables, databases)
- **Data Manipulation Language (DML)**
  - Viewing, inserting, deleting and updating data in a database
- **Data Control Language (DCL)**
  - Access control for data in a database
- **Transaction Control Language (TCL)**
  - Control of transactional processing in a database
  - A transaction is a logical unit of multiple SQL statements.

- Introduction
- Basic SQL Language Elements
- Advanced SQL Language Elements
- SQL-driven Database Features
- Issues of SQL
- SQL Tool: W3Schools

# Data Definition Language: CREATE

```
CREATE TABLE table_name
(
    column_name1 data_type,
    column_name2 data_type,
    .....
)
```

## Data types

Data Type	
integer(size)	Integer, “size” defines the maximum number of digits
decimal(p,s)	p specifies the maximum total number of decimal digits that can be stored, both to the left and to the right of the decimal point. s specifies the maximum number of decimal digits that can be stored to the right of the decimal point.
char(size)	Fixed-length character data (length of “size”)
varchar(size)	Variable-length character data (maximum length of “size”)
date(yyymmdd)	Date [and time] with all four digits of the year, month, day, [hour (in 24-hour format), minute, and second], e.g. 20070115
...	

```
CREATE TABLE Product_Info  
(  
    Article_no integer(10),  
    Weight decimal(2,2),  
    Resolution varchar(9),  
    Power_consumption integer(3)  
)
```

NB: “decimal(2,2)” may not make much sense in the application case, but is syntax wise correct.

Table “Product\_Info”

<u>ID</u>	Article_no	Weight	Resolution	Power_consumption

## **DROP Table Table\_name**

Deletes a specified table from the database.

## **DROP Database Database\_name**

Deletes all tables including the database itself on the database server.



# Data Manipulation Language: Structure of Basic Elements

- Structure of the basic elements (clauses)
  - SELECT attribute(s)
  - FROM relation(s)
  - [ WHERE condition(s) ]
  - [ GROUP BY attribute(s) ]
  - [ ORDER BY attribute(s) ]
- Date Format, Strings and Numbers
  - Date Format: 'YYYY-MM-DD', e.g. '1974-12-31'
  - Strings: 'String', e.g. 'I like SQL'
  - Numbers: Number, e.g. 41 or 34.12

Note:                   (1) Dates and Strings have to be enclosed by two apostrophes.  
                          (2) The clauses in [ ... ] are optional.

**SELECT**                    \*                    ←                    *All columns*  
**FROM**                    Products                    ←                    *table "Products"*  
**ORDER BY**                    ID                    ←                    *order result by column "ID"*

ID	Product_name	Colour	Article_no	Sale_price	Purchase_price	Stock	Items_sold	City
1	Monitor 17"	White	1297812542	399.00	249.99	50	134	Frankfurt
2	Monitor 19"	black	2457897145	499.00	379.00	12	289	Berlin
3	Monitor 17"	black	1297467815	405.00	249.99	25	124	Frankfurt
4	Monitor 19"	white	2459871327	509.00	389.99	150	12	Frankfurt
5	Monitor 20"	black	2789441512	799.00	599.00	520	1052	Berlin
6	Monitor 20"	white	2799151424	829.00	549.99	100	26	Berlin
7	Monitor 20"	anthracite	2764657527	819.00	589.99	50	127	Nürnberg
8	Monitor 21"	anthracite	2845161215	999.00	799.99	100	279	Hamburg
9	Monitor 24"	white	2945712415	1299.00	945.00	25	124	Berlin
10	Monitor 24"	black	2955745742	1350.00	956.00	450	1024	Hamburg
...								

# DML: SELECT using WHERE

**SELECT**                   \*  
**FROM**                   Products  
**WHERE**                  Purchase\_price > 500 AND City = 'Berlin'

<u>ID</u>	Product_name	Colour	Article_no	Sale_price	Purchase_price	Stock	Sold_items	City
5	Monitor 20"	black	2789441512	799.00	599.00	520	1052	Berlin
6	Monitor 20"	white	2799151424	829.00	549.99	100	26	Berlin
9	Monitor 24"	white	2945712415	1299.00	945.00	25	124	Berlin

# DML: SELECT using ORDER BY

**SELECT**            ID, City, Stock  
**FROM**            Products  
**ORDER BY**        ID

<u>ID</u>	City	Stock
1	Frankfurt	50
2	Berlin	12
3	Frankfurt	25
4	Frankfurt	150
5	Berlin	520
6	Berlin	100
7	Nürnberg	50
8	Hamburg	100
9	Berlin	25
10	Hamburg	450
...	...	...

## SELECT using SUM and GROUP BY

**SELECT**                      City, SUM(Stock)  
**FROM**                        Products  
**GROUP BY**                  City

City	SUM(Stock)
Frankfurt	225
Berlin	657
Nürnberg	50
Hamburg	550
...	

# DML: SQL Functions: AVG, SUM, MIN, MAX, COUNT

- Further Aggregation Functions
  - AVG(x) returns the average value of x
  - SUM(x) returns the sum of x
  - MIN(x) returns the minimum value of x
  - MAX(x) returns the maximum value of x
  - COUNT(x) returns the number of values for x
  - STDDEV(x) returns the standard deviation of x.
- x denotes an array of values (e.g. as the result of a SELECT query).

**INSERT INTO**                      **Product\_Info**  
**VALUES**                            **(2689875627,6,'1280X1024',55)**

Table “Product\_Info”

ID	Article_No	Weight	Resolution	Power_Consumption
1	1297812542	4	1280X1024	26
2	2457897145	5	1280X1024	29
3	1297467815	4	1280X1024	27
4	2459871327	5.5	1280X1024	34
5	2789441512	8	1600X1280	53
6	2689875627	6	1280X1024	55
..				

Note: The “ID” column is a primary key and is automatically inserted with the new record.

**INSERT INTO**

Product\_Info (Article\_no, Weight,  
Resolution, Power\_consumption)  
(2689875627,6,'1280X1024',55)

**VALUES**

Table “Product\_Info”

<u>ID</u>	Article_no	Weight	Resolution	Power_consumption
1	1297812542	4	1280X1024	26
2	2457897145	5	1280X1024	29
3	1297467815	4	1280X1024	27
4	2459871327	5.5	1280X1024	34
5	2789441512	8	1600X1280	53
6	2689875627	6	1280X1024	55
..				

Note: The “ID” column is a primary key and is automatically inserted with the new record.



```
UPDATE      Product_Info
SET         Weight = 12
WHERE       Article_no = 2689875627
```

Table “Product\_Info”

<u>ID</u>	Article_no	Weight	Resolution	Power_consumption
1	1297812542	4	1280X1024	26
2	2457897145	5	1280X1024	29
3	1297467815	4	1280X1024	27
4	2459871327	5.5	1280X1024	34
5	2789441512	8	1600X1280	53
6	2689875627	12	1280X1024	55
..				

```
UPDATE      Product_Info
SET         Weight = 12, Resolution = '1800X1400'
WHERE      Article_no = 2689875627
```

Table “Product\_Info”

<u>ID</u>	Article_no	Weight	Resolution	Power_consumption
1	1297812542	4	1280X1024	26
2	2457897145	5	1280X1024	29
3	1297467815	4	1280X1024	27
4	2459871327	5.5	1280X1024	34
5	2789441512	8	1600X1280	53
6	2689875627	12	1800X1400	55
..				

**DELETE FROM**                      Product\_Info  
**WHERE**                              Article\_no = 2689875627

Table “Product\_Info”

<u>ID</u>	Article_no	Weight	Resolution	Power_consumption
1	1297812542	4	1280X1024	26
2	2457897145	5	1280X1024	29
3	1297467815	4	1280X1024	27
4	2459871327	5.5	1280X1024	34
5	2789441512	8	1600X1280	53
..				

deleted:

6	2689875627	12	1280X1024	55
---	------------	----	-----------	----

- Introduction
- Basic SQL Language Elements
- Advanced SQL Language Elements
- SQL-driven Database Features
- Issues of SQL
- SQL Tool: W3Schools

- JOINS are used to create links between two or more tables.
- Tables are associated with each other by using unique keys.
- A primary key (or unique key) is a column containing a unique value for each row in a table.
- Some types of JOINS are:
  - **INNER JOIN**
  - **OUTER JOIN**
  - **LEFT JOIN**
  - **RIGHT JOIN**

# Example Tables for JOIN and UNION

## Table “Products”

ID	Product_name	Colour	Article_no	Sale_price	Purchase_price	Stock	Items_sold	City
1	Monitor 17“	white	1297812542	399.00	249.99	50	134	Frankfurt
2	Monitor 19“	black	2457897145	499.00	379.00	12	289	Berlin
3	Monitor 17“	black	1297467815	405.00	249.99	25	124	Frankfurt
4	Monitor 19“	white	2459871327	509.00	389.99	150	12	Frankfurt
5	Monitor 20“	black	2789441512	799.00	599.00	520	1052	Berlin
..								

## Table “Product\_Info”

ID	Article_no	Weight	Resolution	Power_consumption
1	1297812542	4	1280X1024	26
2	2457897145	5	1280X1024	29
3	2459871327	5.5	1280X1024	34
4	2789441512	8	1600X1280	53
..				

# SELECT statement using INNER JOIN

**SELECT**            Products.Product\_Name, Product\_Info.Weight  
**FROM**            Products **INNER JOIN** Product\_Info **ON**  
                     Products.Article\_No = Product\_Info.Article\_No

Product_name	Weight
Monitor 17"	4
Monitor 19"	5
Monitor 19"	5.5
Monitor 20"	8

**INNER JOIN** combines selected columns of two or more tables by linking them together using a unique key from each table (here **Article\_no**).

# UNION combines the results from two SELECT statements

**SELECT ID, Article\_no FROM Products**  
**UNION**  
**SELECT ID, Article\_no FROM Product\_Info**

<u>ID</u>	Article_no
1	1297812542
2	2457897145
3	1297467815
4	2459871327
5	2789441512

**SELECT ID, Article\_no FROM Products**  
**UNION ALL**  
**SELECT ID, Article\_no FROM Product\_Info**

<u>ID</u>	Article_no
1	1297812542
2	2457897145
3	1297467815
4	2459871327
5	2789441512
1	1297812542
2	2457897145
3	2459871327
4	2789441512

- **UNION** combines the results of two SQL SELECT queries to a single result set. For this, the same number of columns and compatible data types are required in each SELECT statement. Duplicate records are automatically removed unless **UNION ALL** is used.



- Introduction
- Basic SQL Language Elements
- Advanced SQL Language Elements
- SQL-driven Database Features
- Issues of SQL
- SQL Tool: W3Schools

- “Stored procedure”
  - constitutes a logical unit of multiple SQL statements saved in a database,
  - allows more complex statements and offers several programming language aspects (e.g. use of variables).

# Stored Procedures without variables

```
CREATE PROCEDURE product_weight  
AS  
SELECT          Products.Product_name, Product_Info.Weight  
FROM           Products INNER JOIN Product_Info ON  
                Products.Article_no = Product_Info.Article_no
```

Product name	Weight
Monitor 17"	4
Monitor 19"	5
Monitor 19"	5.5
Monitor 20"	8

# Stored Procedures using Variables

Table "Product\_Info"

<u>ID</u>	Article_no	Weight	Resolution	Power_consumption
1	1297812542	4	1280X1024	26
2	2457897145	5	1280X1024	29
4	2459871327	5.5	1280X1024	34
5	2789441512	8	1600X1280	53
6	2689875627	6	1280X1024	55
..				

**CREATE PROCEDURE**

**add\_product\_info**

**@Article\_no integer(10),**

**@Weight decimal(2,1)**

**@Resolution varchar(12),**

**@Power\_consumption integer(4)**

**AS**

**INSERT INTO Product\_info (Article\_no, Weight, Resolution,  
Power\_consumption)**

**VALUES (@Article\_no, @Weight, @Resolution,  
@Power\_consumption)**

# Stored Procedures: Exec statement

- Execution of Stored Procedures
  - The product\_weight procedure does neither accept nor require any input parameters:

**exec product\_weight**

- The add\_detail procedure requires input parameters:
  - Variables are used to pass data to the procedure:

**exec add\_product\_info 2689875627, 6, '1280X1024', 55**

- A database *trigger* is a stored procedure which is **automatically executed** in case predefined events occur within in a database.
- Typical Trigger events are the insertion, update or deletion of data sets.

- Triggers can be used to:
  - enforce business rules (e.g. verify that every invoice has at least one item);
  - replicate data (e.g. create a history record for every data modification, which can be transferred to a data warehouse later);
  - enhance database performance (e.g. update account balance after every transaction for faster queries);
  - maintain the integrity of information in the database;
  - log data modifications (e.g. add time-stamp from server clock);
  - ...

- Introduction
- Basic SQL Language Elements
- Advanced SQL Language Elements
- SQL-driven Database Features
- Issues of SQL
- SQL Tool: W3Schools



- Compatibility issues between different manufacturer implementations of the SQL standard



SYBASE®

- Introduction
- Basic SQL Language Elements
- Advanced SQL Language Elements
- SQL-driven Database Features
- Issues of SQL
- SQL Tool: W3Schools

# • SQL Tool: W3Schools

- Created in 1998 as a school for web developers, offering free courses and exercises on web development.
- No download required, available under <https://www.w3schools.com/sql/>.
- Will be used in this course.

SQL Statement:

```
SELECT * FROM Customers;
```

Edit the SQL Statement, and click "Run SQL" to see the result.

Run SQL »

Result:

Number of Records: 91

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Country
1	Alfreds Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Germany
2	Ana Trujillo Emparedados y helados	Ana Trujillo	Avda. de la Constitución 2222	México D.F.	05021	Mexico
3	Antonio Moreno Taquería	Antonio Moreno	Mataderos 2312	México D.F.	05023	Mexico
4	Around the Horn	Thomas Hardy	120 Hanover Sq.	London	WA1 1DP	UK


Your Database:

Tablenames	Records
Customers	91
Categories	8
Employees	10
OrderDetails	518
Orders	196
Products	77
Shippers	3
Suppliers	29

# Backup Solution

## SQL Tool2: LiveWin

- LiveWIN is an SQL training platform by the Chair of e-Finance.
- It can be downloaded from our course website.

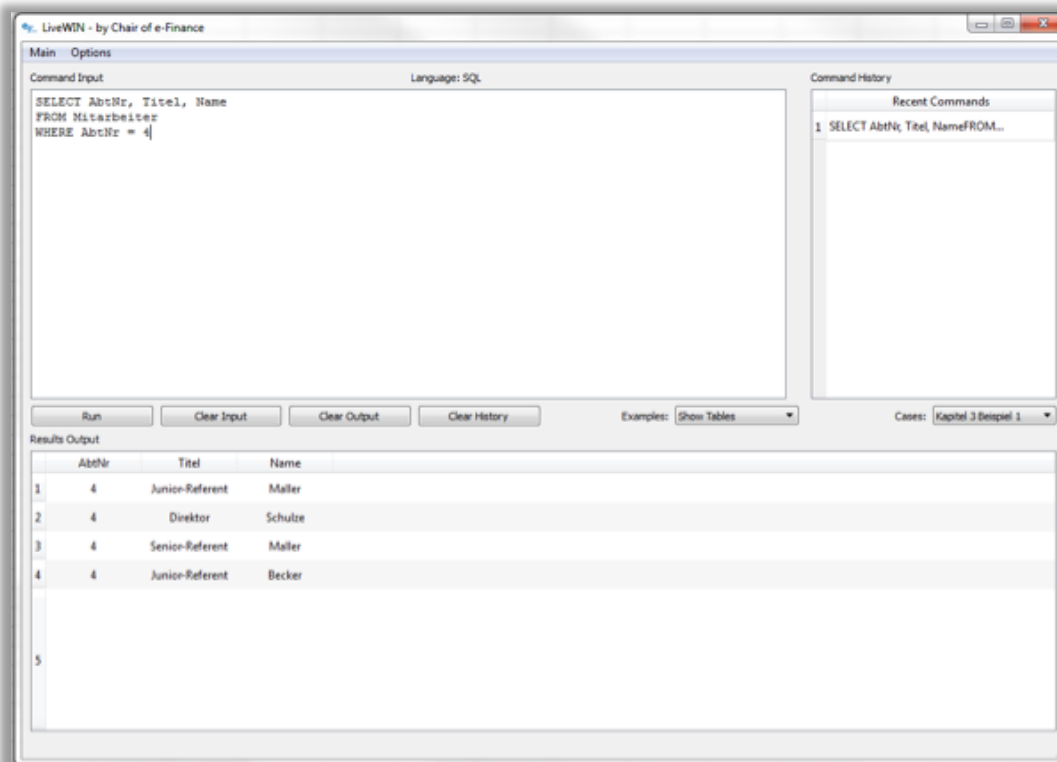

- Alan Beaulieu (2009) Einführung in SQL, O'Reilly.

